


Protek 656 & 868 Rebound Bespoke Gates

Lemon
FENCING



Hinge Detail

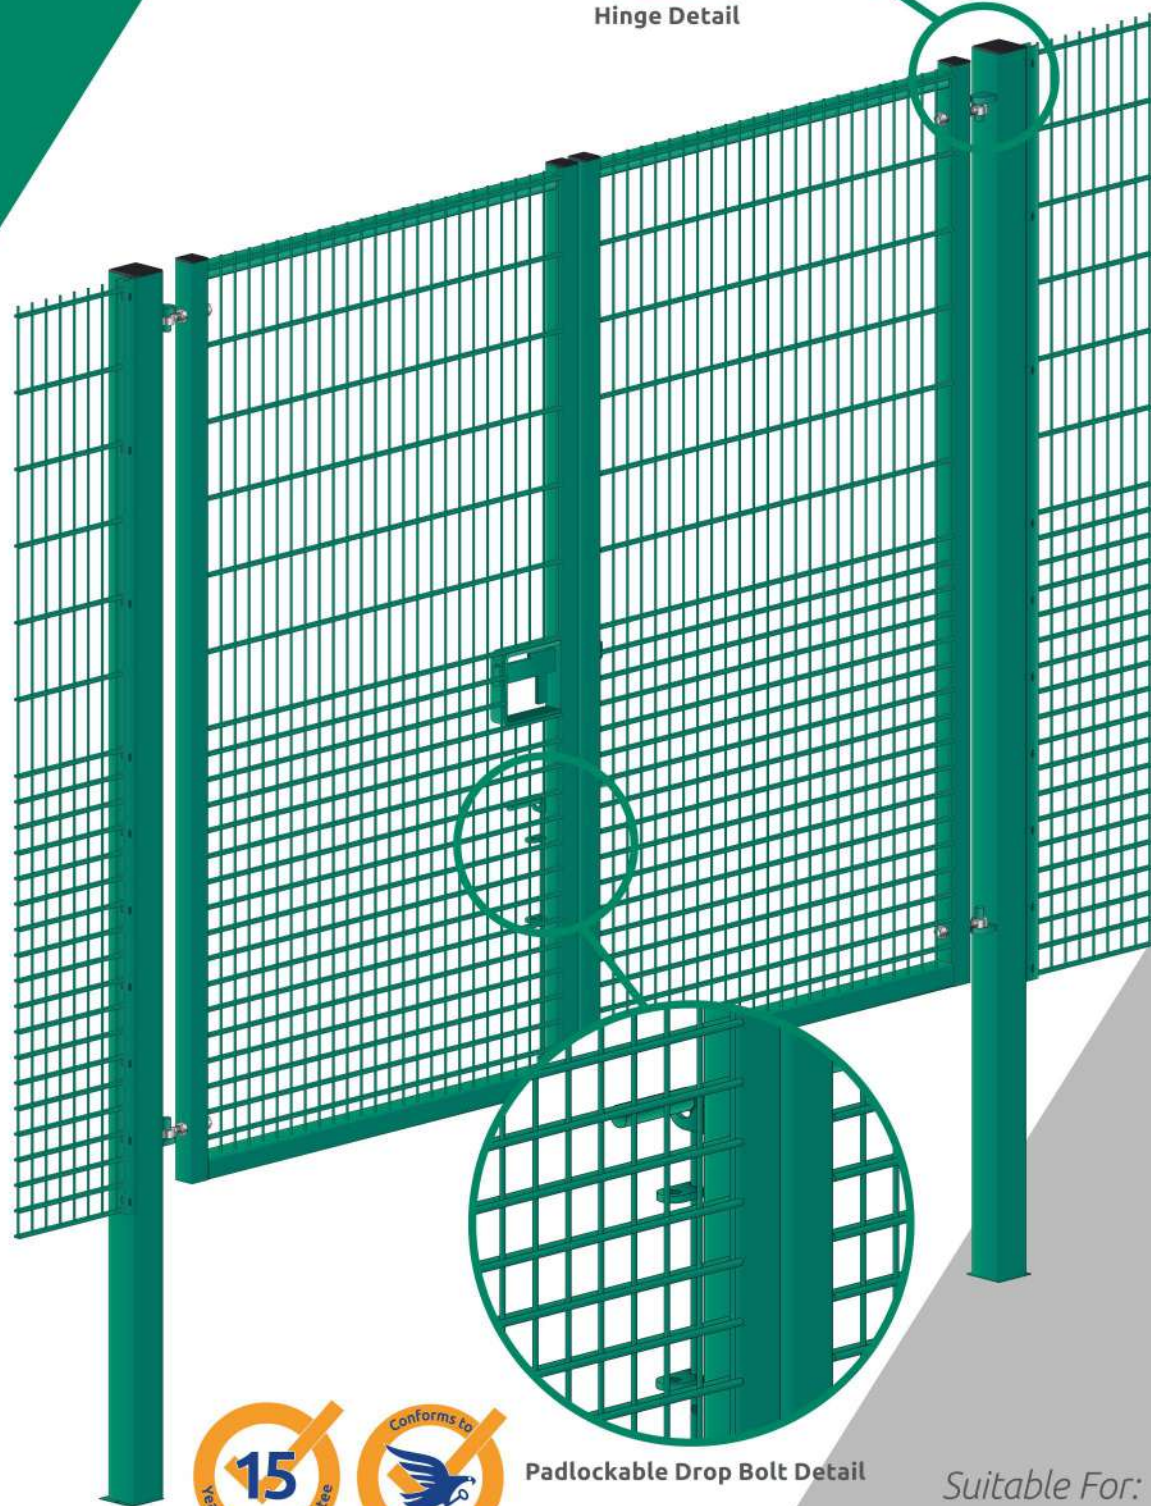

Padlockable Drop Bolt Detail



Suitable For:

see Protek 656 and 868
Rebound panels on
pages 38-41

Protek 656 & 868 Rebound Bespoke Gates

Double Leaf and Single Leaf

A bespoke alternative to the standard option will allow the specifier to make modifications to the gates construction and operation. Mesh is welded onto the frame. For details on how standard gate


manufacture can be changed to suit a particular requirement please refer to pages 96-97 for a list of possible options. A range of locks and gate accessories can also be found on pages 98-101.

Product and Finish Standards

- Mesh panel wire manufactured to BS 4102 and galvanised to BS EN 10244-2:2001 class D, weld strength is 75% of the minimum tensile strength of the wire (tensile range 540-690 N/m²) - Post material manufactured to BS EN 10210-2:1997 and galvanised to BS EN 10346:2009 - Panels & Posts are powder coated to BS EN 13438:2005 (min 100micron) - All welding carried out in accordance with BS EN 1011-1 and BS EN 1011-2 by suitable personnel qualified according to BS EN 287-1

Options

- Full Rebound, Lintel Panels
- See the Gates Technical section on pages 96-97
- See the range of Gate Accessories on pages 98-101

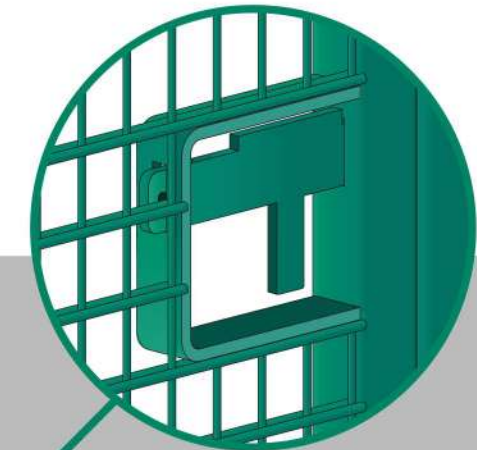

Padlockable Slide Bolt Detail



With Lintel Panel



Ragging plates to
key into concrete
foundation

**Protek 656 & 868
Rebound Bespoke Gates**