




# How to fit log edging

Log edging comes in various forms and is used to 'finish' and dress a section of garden. Grange supply two main types: fixed straight boards for when long straight runs are required and flexible edging rolls suitable for curved areas. Both types come in a variety of forms

## LOG ROLL

As the name suggests, this form of edging is flexible and takes the form of half-round or full round logs, held together with steel wire.


Particularly suitable for curved borders or irregularly shaped garden areas, log roll is generally supplied in an easy-to-carry roll.

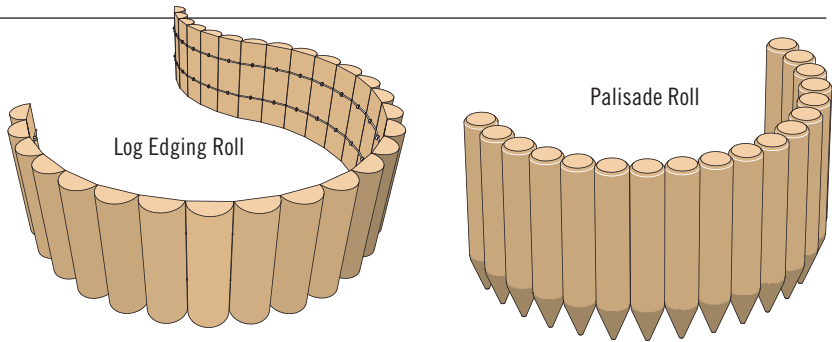

## LOG BOARD

Log Board is supplied in rigid shorter lengths and provides a straight edge where a long run is required. They can also be used for small retaining work.

All our log boards have integral spikes which means they can be driven directly into the ground.

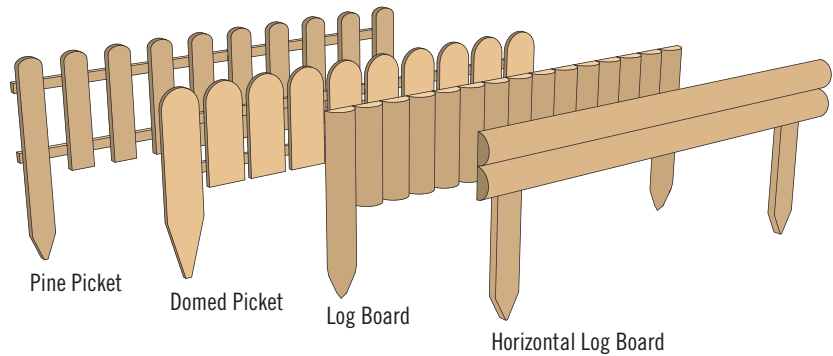

## METHODS OF FIXING

Grange supply both timber stakes and metal Metpins to secure Log Edging Roll to the ground.

Metpins are fixed to the back of the log edging using galvanised nails driven through the pre-drilled holes in the Metpin (1).

Timber stakes are driven into the ground and the edging roll is fixed to them using two screws to go through the stake into the log (2).

Drive Log Boards directly into the ground, alternating between each end when hammering in and use a spare piece of timber to protect the top of the board from the hammer. Screw small lengths of timber to the ends of the boards to act as braces and keep them straight (3).

