





# Rotating Anti-Climb

Wall & Fence Intruder Protection

Manufactured from a high tensile aluminium alloy, our rotating anti-climb wall spikes are highly resistant to corrosion, while being lightweight (4kg per linear metre).

The bright finish will also last the lifetime of the product, making this wall security spike system maintenance free. Alternatively, if you'd like your fence guard to match your building or corporate colours, the system can be powder coated to most RAL and BS colour references.

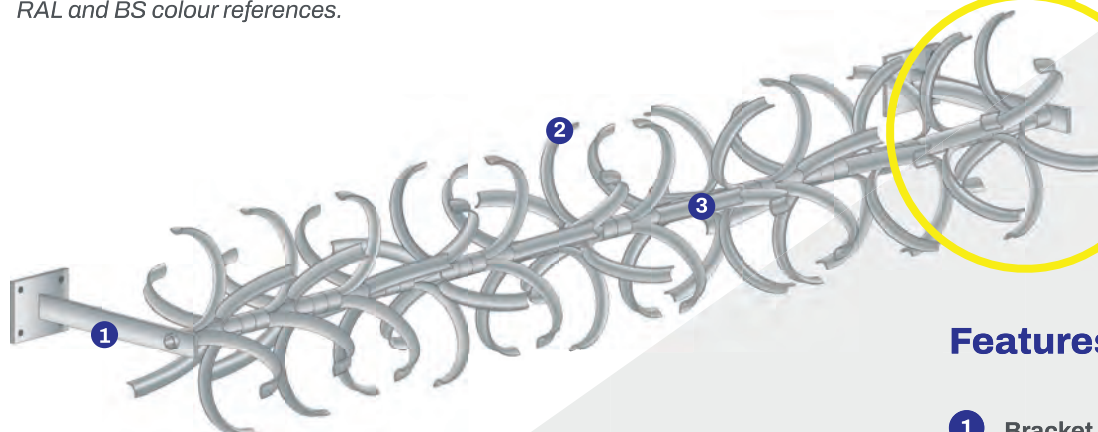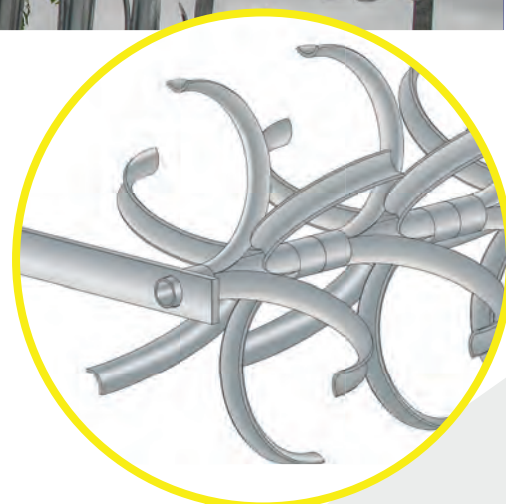

## Features

- 1 Bracket (Different styles available)
- 2 Vane
- 3 Shaft
- 4 Spigot

## Versatile Security Applications

Our rotating anti-climb system feature a series of three-point vanes, each free to revolve around a central spindle, creating an unstable barrier which rotates if anyone attempts to climb over it. With no stable places to maintain grip or secure footing, this type of wall security spikes are very effective at stopping intruders. In tests, army personnel found this type of fence topper particularly difficult to negotiate.



RAL colours available as special order

# Rotating Anti-Climb

## DATASHEET

Version 1.0 | 09-23

### Brackets



#### Cranked

To crank system into site or towards attack face.



#### Straight/Twisted

To support system directly above a fenceline.



#### Straight

To support system directly above a fenceline.



#### Base Plated

To fit on wall tops, concrete plinths and flat roofs.

### Individual Components



#### Central Shaft

To form central axis supporting the rotating vanes. Length: 2000mm. Diameter 25mm.



#### Spigot

To join shafts together.



#### Corner Connector

To join two runs together at 90°.



#### Vane

Individual rotating spikes.

Lemon Fencing is the trading name of W. B. Lemon Fencing Ltd. Registered Office: 103-105 Leigh Road, Leigh-on-Sea, Essex, SS9 1JL.

While care has been taken to ensure that all information provided on this data sheet is accurate, we reserve the right to change product specifications at any time. E&OE.



### Fixings

#### 1 M8 x 40mm Saddle Bolt & Shear Nut

For use with Cranked, Straight, Straight/Twisted brackets. Fence mounted.

#### 2 M8 x 80mm Through Bolt

For use with Cranked, Straight, Straight/Twisted, Baseplates. Concrete mounted.

#### 3 M8 x 110mm Chem Stud

For use with Cranked, Straight, Straight/Twisted, Baseplates. Concrete mounted.

