

Protek Rebound Gates


Twin-Wire Sports Mesh Security Gates

Available in a standard range of heights and widths, the Protek Rebound gates are an affordable addition to your sports area.

Manufactured to your bespoke size, or for quick lead time we stock a comprehensive range of singles and doubles in various heights and widths. Hinges are inverted on all gates to prevent lift off. Double leaf gates come complete with drop-bolts and ground sockets and single leaf gates can have drop-bolts added as an extra at the manufacturing stage. All gates come with a padlockable slide-latch, padlock not provided.

Protek Rebound Gate Features


- 1 Padlockable Slidebolt
- 2 Adjustable Hinges & Gate Restrainer
- 3 Padlockable Dropbolts
- 4 Ragging plates to key into concrete
- 5 Lintel Panel










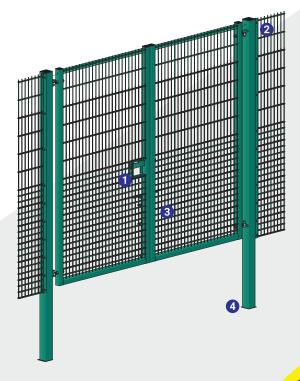









Protek Rebound Gates

DATASHEET

Version 1.1 | 02-25



Slide Latch With No Protruding Handle

Our slide latches are padlockable and are designed and manufactured not to have any edges that protrude outside of the gate face. This is especially important when gates are used in the education sector.



Gate Restrainers Fitted As Standard

All Protek gates also come with gate restrainers, a simple but essential safety device to prevent the gate failing should the top or bottom hinge fail. These very strong restrainers are capable of holding gate leaves on all sizes in the Protek range.



In-Board Dropbolts With No Protruding Edges

Both our single and double-leaf gates feature in-board dropbolts that can be padlocked. The in-board design keeps the bolt flush against the gate face when in the open or locked position.

Options

- Various lock options available including, Key Lock, Digital Lock, Maglock and Panic Latch
- Self-Close Hinges
- Locking Dropbolts
- Lintel Panel

Applications

- Schools
- Sports Facilities
- MUGAS
- Playgrounds

Lemon Fencing is the trading name of W. B. Lemon Fencing Ltd. Registered Office: 103-105 Leigh Road, Leigh-on-Sea, Essex, SS9 1JL.

Protek is a registered trademark of Alexandra Security Ltd

While care has been taken to ensure that all information provided on this data sheet is accurate, we reserve the right to change product specifications at any time. E&OE.

Product Technical Information

- Mesh panel wire manufactured to BS 4102 and galvanised to BS EN 10244-2:2001 class D, weld strength is 75% of the minimum tensile strength of the wire (tensile range 540-690 N/m2)
- Post material manufactured to BS EN 10210-2:1997 and galvanised to BS EN 10346:2009
- Panels & Posts are powder coated to BS EN 13438:2005 (min 100 micron)
- All welding carried out in accordance with BS EN 1011-1 and BS EN 1011-2 by suitable personnel qualified according to BS EN 287-1

15 Year Product Guarantee

We work hard to ensure that when you choose us, there are no shocks or surprises, and that the finished item we deliver looks and functions every bit as well as the initial concept. But should the worst happen we can guarantee that we will not stop until everything has been resolved, and are proud to say that we have a 100% satisfaction rating on all post sale issues. In addition, we are able to offer a 15-year guarantee, covering the performance and appearance of our mesh fencing systems. Giving you added confidence when specifying one of our products.



